


IC

SERIES

	Solid Red - Charger Fault. See display panel for details.		Solid Blue - AC power available.
	Flashing Amber - Caution. External error condition. See display panel for details.		Flashing Green - Low state of charge. Solid Green - High state of charge.
	Flashing Green - USB port active. Solid Green - Safe to remove USB flash drive.		Flashing Green - High state of charge. Solid Green - Charge complete.

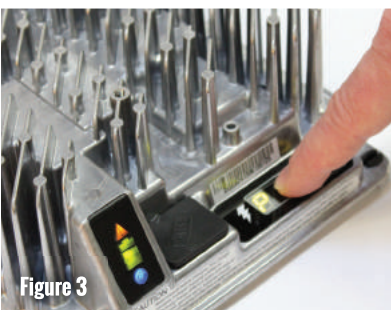

Selecting a Charge Profile

- 1 Disconnect AC input from the charger, or from the wall outlet. Wait 30 seconds for the input relay to open. (See Figure 1)
- 2 While reconnecting AC input, press and hold the Select Charge Profile Button. Hold the button until Error Indicator is on and Battery Charging Indicator starts flashing.
- 3 Press and release the Select Charge Profile Button to advance through charging profiles loaded on the charger. The selected charging profile will be displayed up to three times (e.g. "P-0-1" for Profile 11). (See Figure 2)
- 4 Once desired charging profile is displayed, press and hold button for 10 seconds to confirm selection and exit Profile Selection Mode. (See Figure 3)
- 5 Press the Select Charge Profile Button to check that the desired profile is selected.

For more information, visit the Delta-Q support page:
www.delta-q.com/support/