



Model: HC30



HIGH RATE DISCHARGE @ 77° (25°C) - STARTING			
5 Seconds	10 Seconds	20 Seconds	30 Seconds
950 Amps	850 Amps	720 Amps	635 Amps


EXTENDED DISCHARGE @ 77° (25°C) to 10.02V - DEEP CYCLE						
5 Min	15 Min	1 Hour	3 Hour	5 Hour	10 Hour	20 Hour
134 Amps	60.8 Amps	20.2 Amps	7.89 Amps	5.0 Amps	2.72 Amps	1.5 Amps

- ### PERFORMANCE FEATURES
- PHCA: 950A at 80°F (27°C) for 5 seconds
 - CCA: 450A at 0°F (-18°C)
 - CA/MCA: 550A at 32°F (0°C)
 - HCA: 635A at 80°F (27°C)
 - 30AH @20 Hr Rate
 - Reserve capacity: 60 minutes
 - Short circuit current: 1550A
 - Operation temperature range: -5°F (-15°C) to 122°F (50°C)

- ### BATTERY DESIGN
- 12V VRLA **Starting/Deep Cycle** Battery
 - Absorbed Glass Mat (AGM) technology
 - Sealed Construction (Non-Spillable Battery)
 - Can be mounted in any orientation except inverted
 - US DOT, IMDG, ICAO and IATA certified non-spillable
 - Can be fitted with brass automotive terminal
 - Durability - withstands shock and vibration
 - Available with metal casing for high heat applications

NOMINAL DIMENSIONS

Length		Width		Height		Total Height		Weight	
mm	inch	mm	inch	mm	inch	mm	inch	kg	pound
250	9.84	97	3.82	142	5.59	156	6.14	10.60	23.37

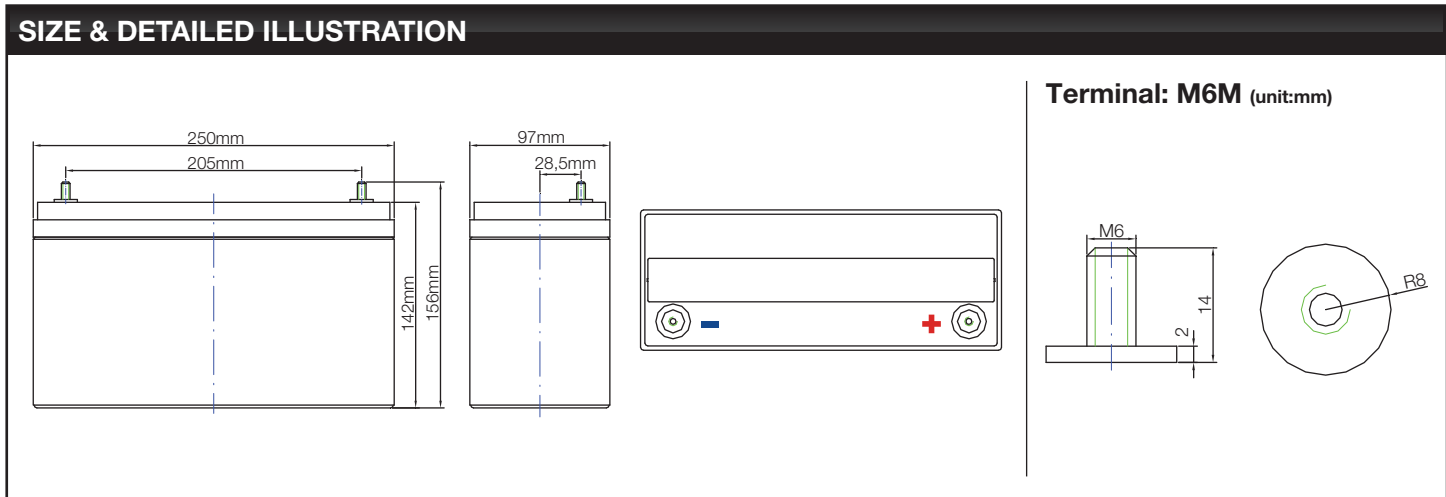

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modifications without notice. Contact Fullriver for the latest information.