

Maintenance Free - High Capacity Dual Purpose AGM Batteries

Model: **HC64**



HIGH RATE DISCHARGE @ 77° (25°C) to 7.2V - STARTING

5 Seconds	10 Seconds	15 Seconds	20 Seconds
1400 Amps	1280 Amps	1170 Amps	1100 Amps

EXTENDED DISCHARGE @ 77° (25°C) to 10.02V - DEEP CYCLE

5 Min	15 Min	1 Hour	3 Hour	5 Hour	10 Hour	20 Hour
285 Amps	125 Amps	38 Amps	17.5 Amps	11 Amps	6.2 Amps	3.4 Amps

PERFORMANCE FEATURES

- PHCA: 1400A at 80°F (27°C) for 5 seconds
- CCA: 750A at 0°F (-18°C)
- CA/MCA: 900A at 32°F (0°C)
- HCA: 1080A at 80°F (27°C)
- Reserve capacity: 120 minutes
- 64AH @ 20Hr Rate
- Short circuit current: 2000A
- Operation temperature range: -5°F (-15°C) to 122°F (50°C)


BATTERY DESIGN

- 12V VRLA **Starting/Deep Cycle** Battery
- Absorbed Glass Mat (AGM) technology
- Sealed Construction (Non-Spillable Battery)
- Can be mounted in any orientation except inverted
- US DOT, IMDG, ICAO and IATA certified non-spillable
- Can be fitted with brass automotive terminal
- Durability - withstands shock and vibration
- Available with metal casing for high heat applications

NOMINAL DIMENSIONS

Length		Width		Height		Total Height		Weight	
mm	inch	mm	inch	mm	inch	mm	inch	kg	pound
240.3	9.46	173.7	6.84	202	7.95	220	8.64	22.30	49.16

SIZE & DETAILED ILLUSTRATION

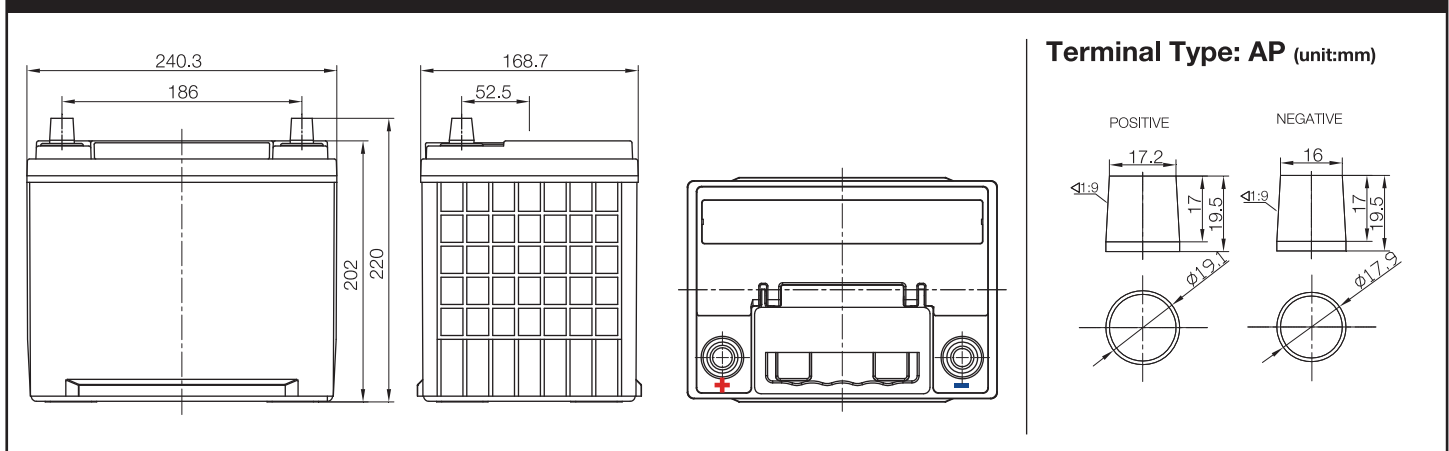

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modifications without notice. Contact Fullriver for the latest information.