



Model: HC65

BCI Group: 34



HIGH RATE DISCHARGE @ 77° (25°C) - STARTING

5 Seconds	10 Seconds	20 Seconds	30 Seconds
1500 Amps	1280 Amps	1170 Amps	1100 Amps

EXTENDED DISCHARGE @ 77° (25°C) to 10.02V- DEEP CYCLE

5 Min	15 Min	1 Hour	3 Hour	5 Hour	10 Hour	20 Hour
305 Amps	145 Amps	47 Amps	18 Amps	11 Amps	6.2 Amps	3.4 Amps

PERFORMANCE FEATURES

- PHCA: 1500A at 80°F (27°C) for 5 seconds
- PCCA: 1020A at 0°F (-18°C) for 5 seconds
- CCA: 825A at 0°F (-18°C)
- CA/MCA: 1000A at 32°F (0°C)
- HCA: 1200A at 80°F (27°C)
- Reserve capacity: 135 minutes
- Short circuit current: 3100A
- Deep cycling capability: 400 at 80% DOD
- Operation temperature range: -22°F (-30°C) to 122°F (50°C)


BATTERY DESIGN

- 12V VRLA **Starting/Deep Cycle** Battery
- Absorbed Glass Mat (AGM) technology
- Sealed Construction (Non-Spillable Battery)
- Can be mounted in any orientation except inverted
- US DOT, IMDG, ICAO and IATA certified non-spillable
- Can be fitted with brass automotive terminal
- Durability - withstands shock and vibration

NOMINAL DIMENSIONS

Length		Width		Height		Total Height		Weight	
mm	inch	mm	inch	mm	inch	mm	inch	kg	pound
261	10.28	171.5	6.75	182.5	7.19	186.5	7.34	20.8	45.86

SIZE & DETAILED ILLUSTRATION

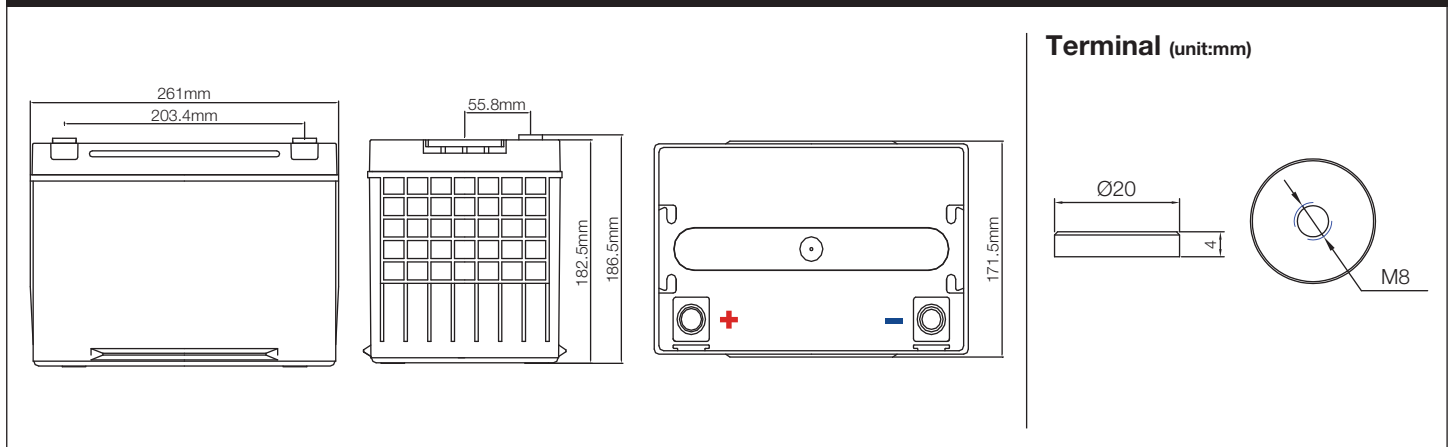

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modifications without notice. Contact Fullriver for the latest information.