



# FFD260-12

(Group Size: 8D)

Deep Cycle Sealed  
Maintenance-Free  
AGM Battery



**FULL FORCE**  
BATTERY

## CRANKING PERFORMANCE

CA 32°F	CCA 0°F
1850	1550

## RESERVE CAPACITY

@25 AMPS	@75 AMPS
560 Minutes	160 Minutes

## CONSTANT CURRENT DISCHARGE (Amps)

CUT OFF VOLTAGE V/cell	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	205	151	130	96	56	38	31	21.6	18.4	13	11.5


## SPECIFICATIONS

Nominal Voltage		12 Volt
Rated Capacity (20 hour rate)		260 AH
Dimensions	Total Height (including terminals)	245 mm (9.65")
	Height	220 mm (8.66")
	Length	521 mm (20.51")
	Width	269 mm (10.59")
Weight		73.1 kg (161.2 lbs)


## CHARACTERISTICS

<b>Capacity</b> 77°F (25°C)	20 Hour Rate (1.75A to 10.5 Volts)	260AH
	10 Hour Rate (21.6A to 10.2 Volts)	200AH
	5 Hour Rate (40A to 10.2 Volts)	135AH
<b>Internal Resistance</b>	Full charged Battery 77°F (25°C)	3.3m Ω
<b>Capacity Affected by Temperature</b> (20 Hour Rate)	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
	5°F (-15°C)	65%
<b>Self-Discharge</b> 77°F(25°C)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
<b>Max. Discharge Current</b> 77°F (25°C)	2000A (5s)	
<b>Terminal</b>	Standard	L (Flag)
<b>Charging</b> (Constant Voltage)	<b>Cycle</b>	Initial Charging Current ≤ 0.2 x C20 13.9 V ~ 14.2 V/77°F (25°C)
	<b>Float</b>	13.3 V ~ 13.5 V/77°F (25°C)

## DISCHARGE CHARACTERISTICS

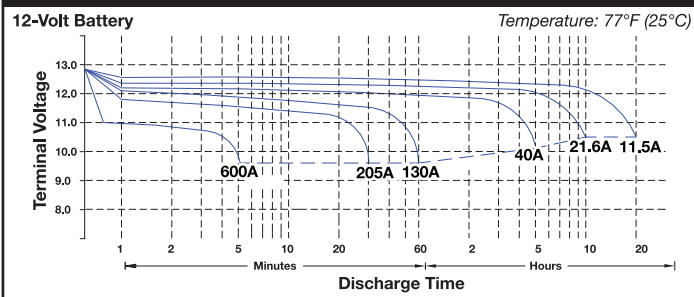

## SIZE & DETAILED ILLUSTRATION

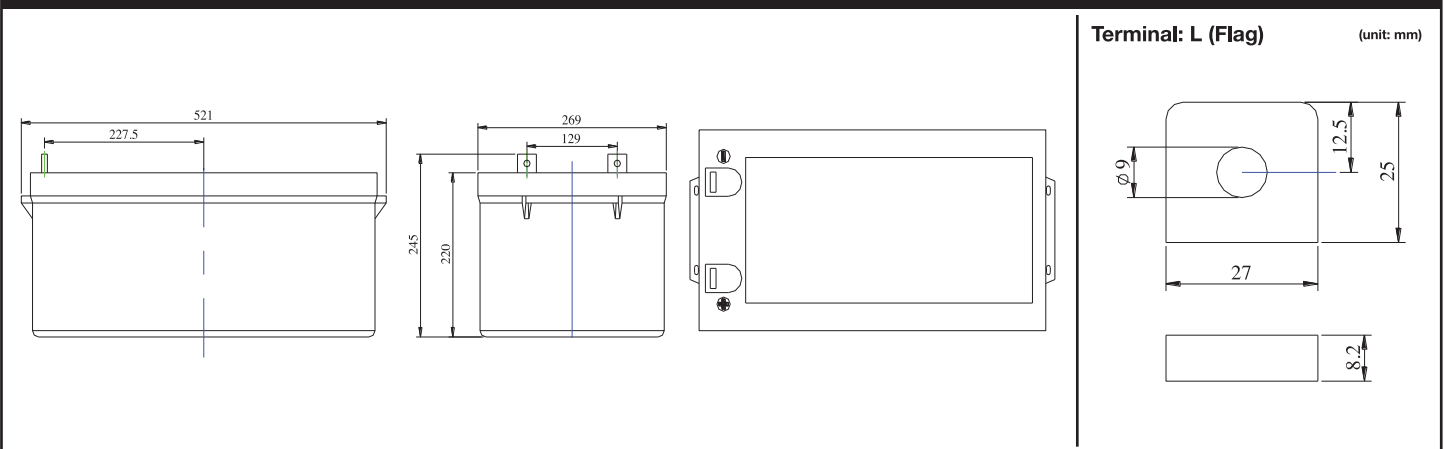

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modifications without notice. Contact Fullriver for the latest information.